



DISTRIBUTOR UNIVERSAR 638

COMAP

DESCRIPTION

One-pipe and two-pipe distributor with an adjustable outflow.

VERSIONS

Tube connection	Male M22, 3/4E
Center to center	35,40,50
Outflow	Adjustable



BENEFITS

- One-pipe and two-pipe
- Isolation and by-pass
- Adjustable outflow (180°) for a wall or floor connection.
- Isolation function

MATERIALS

Body and spindle : Brass
O'ring : EPDM

SPECIFICATION


- Heating water system
- Maximum pressure of use: 10 bar
- Maximum water temperature: 110°C



DISTRIBUTOR UNIVERSAR 638


COMAP

CONCEPTION



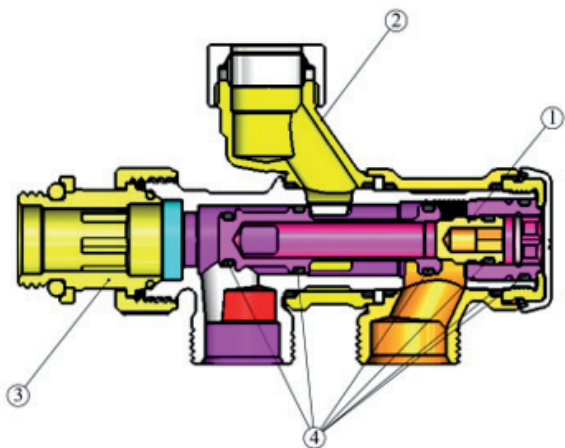


1. Spindle that allow the transition between one-pipe and two pipe
2. Body with adjustable position
3. Nut with 2 o'ring
4. O'ring EPDM

2 pipe position



1 pipe position

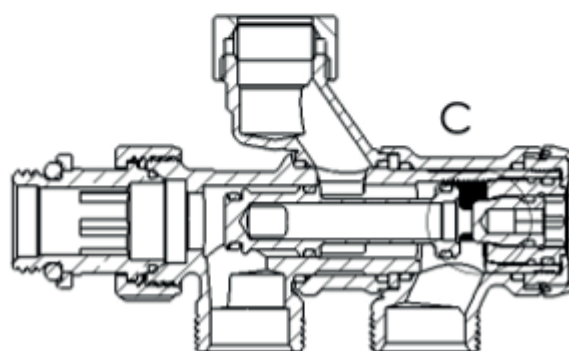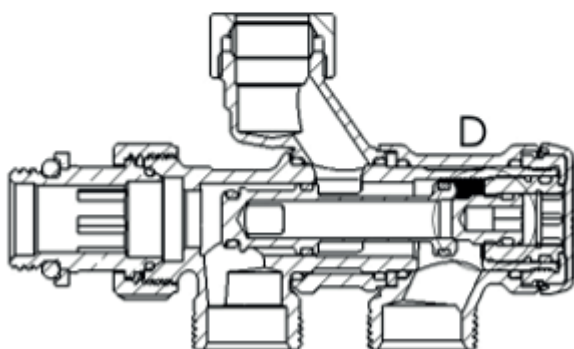




DISTRIBUTOR UNIVERSAR 638

COMAP

DIMENSIONS

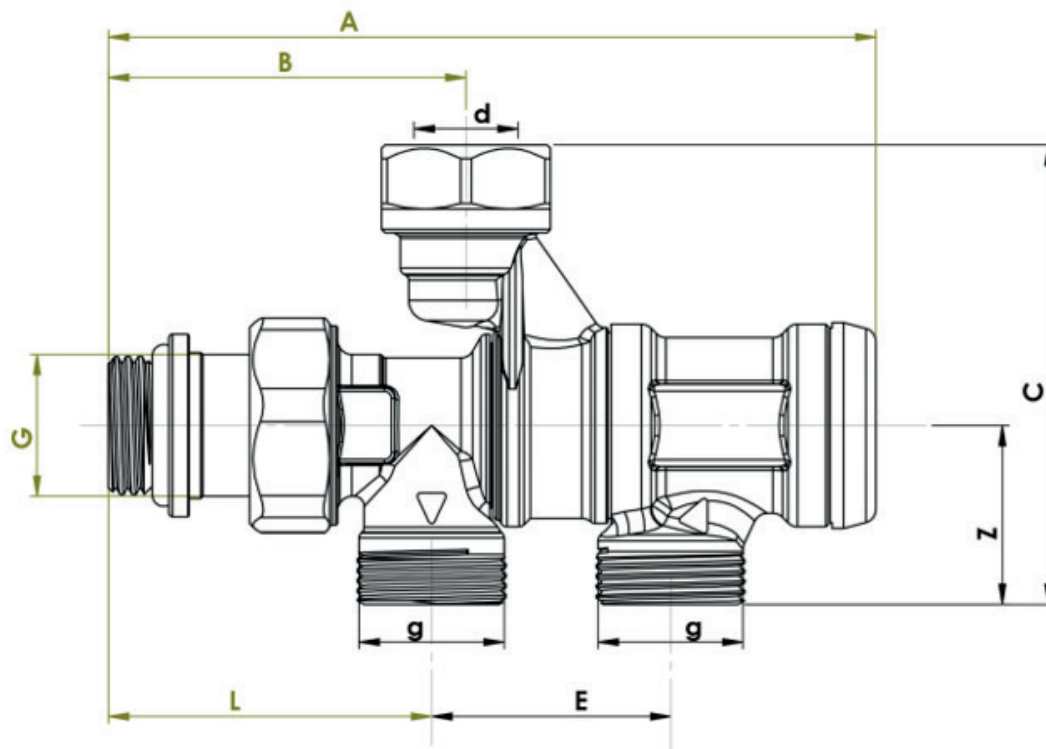

Model	Part	G	g	A	B	C	d	E	L	Z
638	638022	1/2"	M22x1.5	114	53	68	15	35	48	26.5
	6380224							40		
638D	638034	1/2"	3/4"E			72		50		29

PRODUCT LINE

Photo	Alimentation	Radiator connection	Pipe connection	Center to center	Codes
	Floor or wall	1/2"	M22	35	638022
				40	6380224
	Floor or wall	1/2"	3/4"E	50	638034




DISTRIBUTOR UNIVERSAR 638



GRAPH

638-638D 1/2» two-pipe

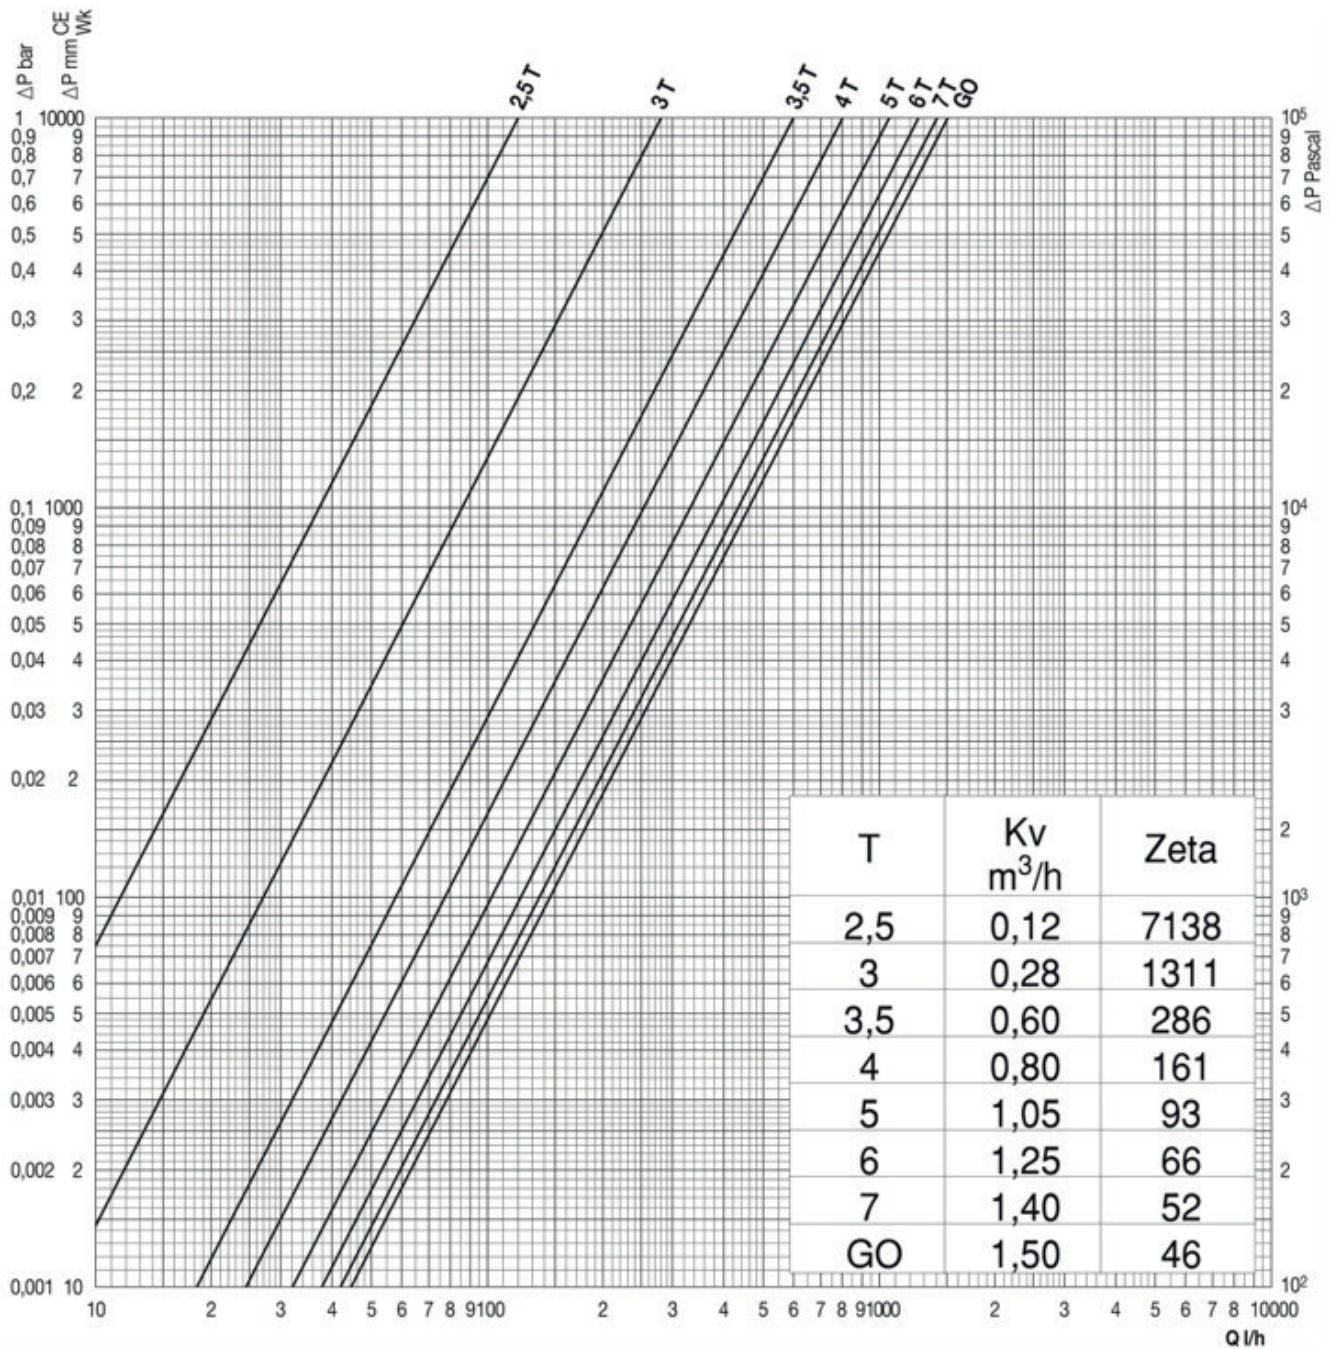




DISTRIBUTOR UNIVERSAR 638



638-638D One-pipe

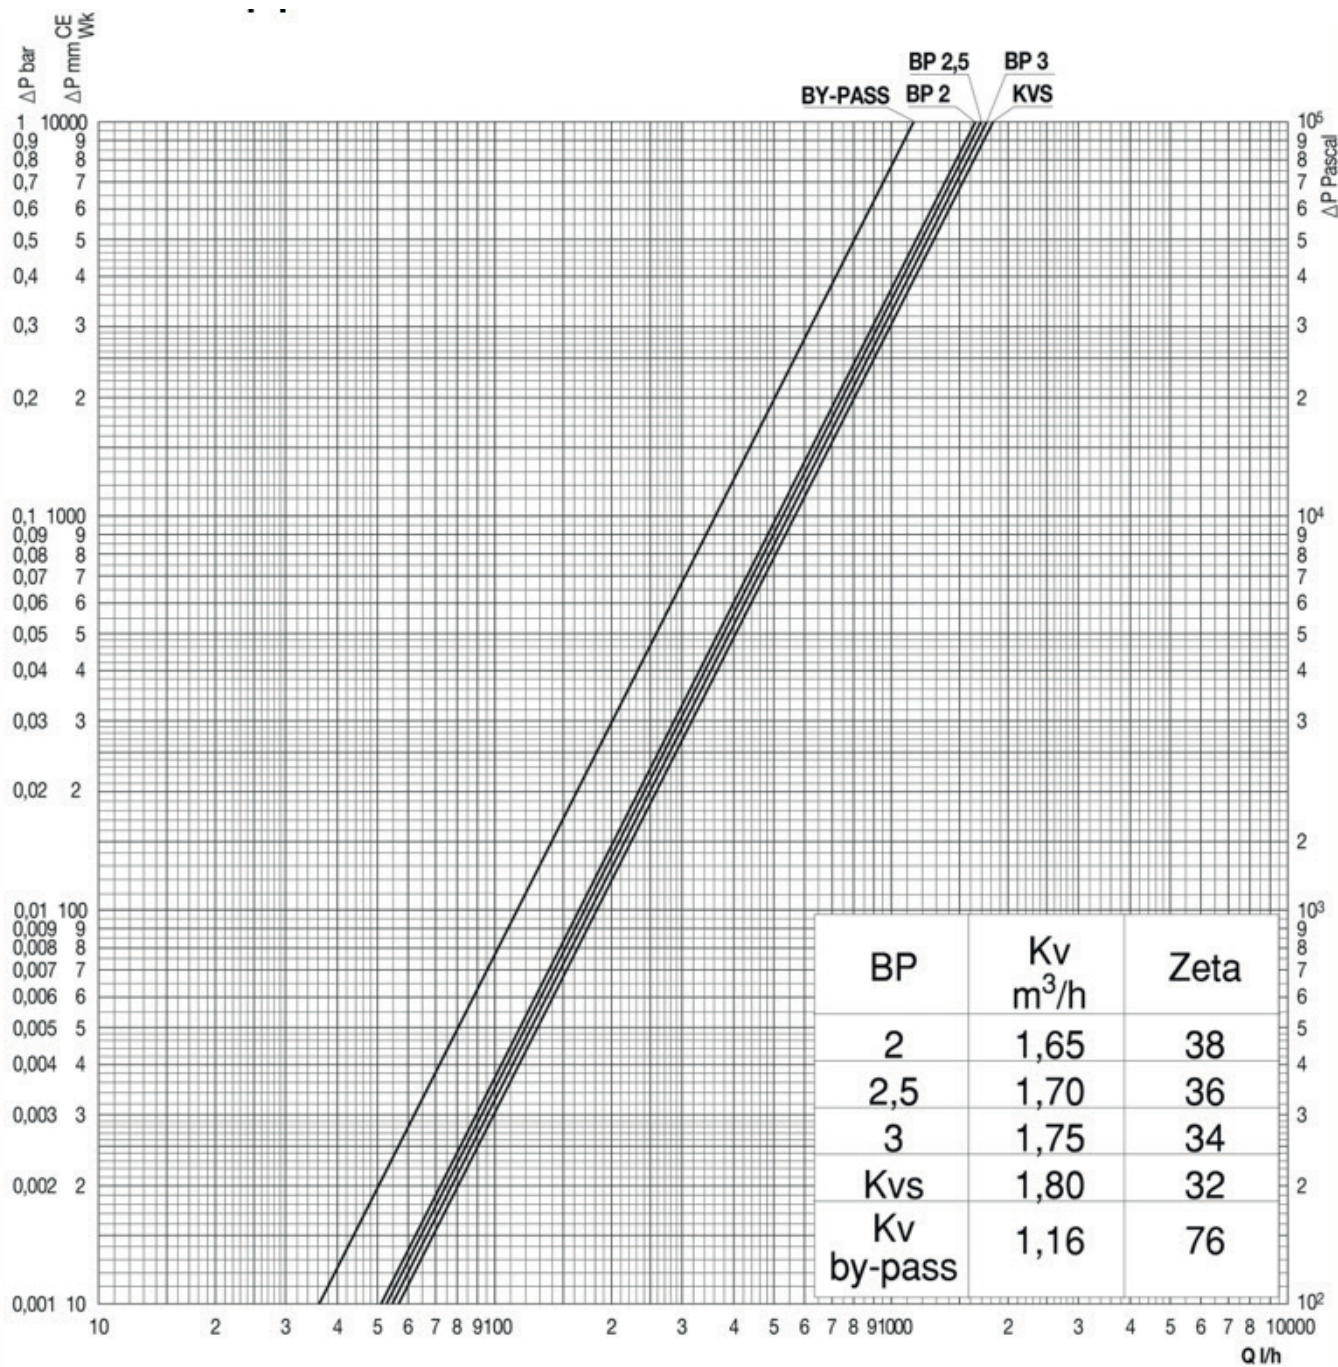





DISTRIBUTOR UNIVERSAR 638



COMBINATIONS

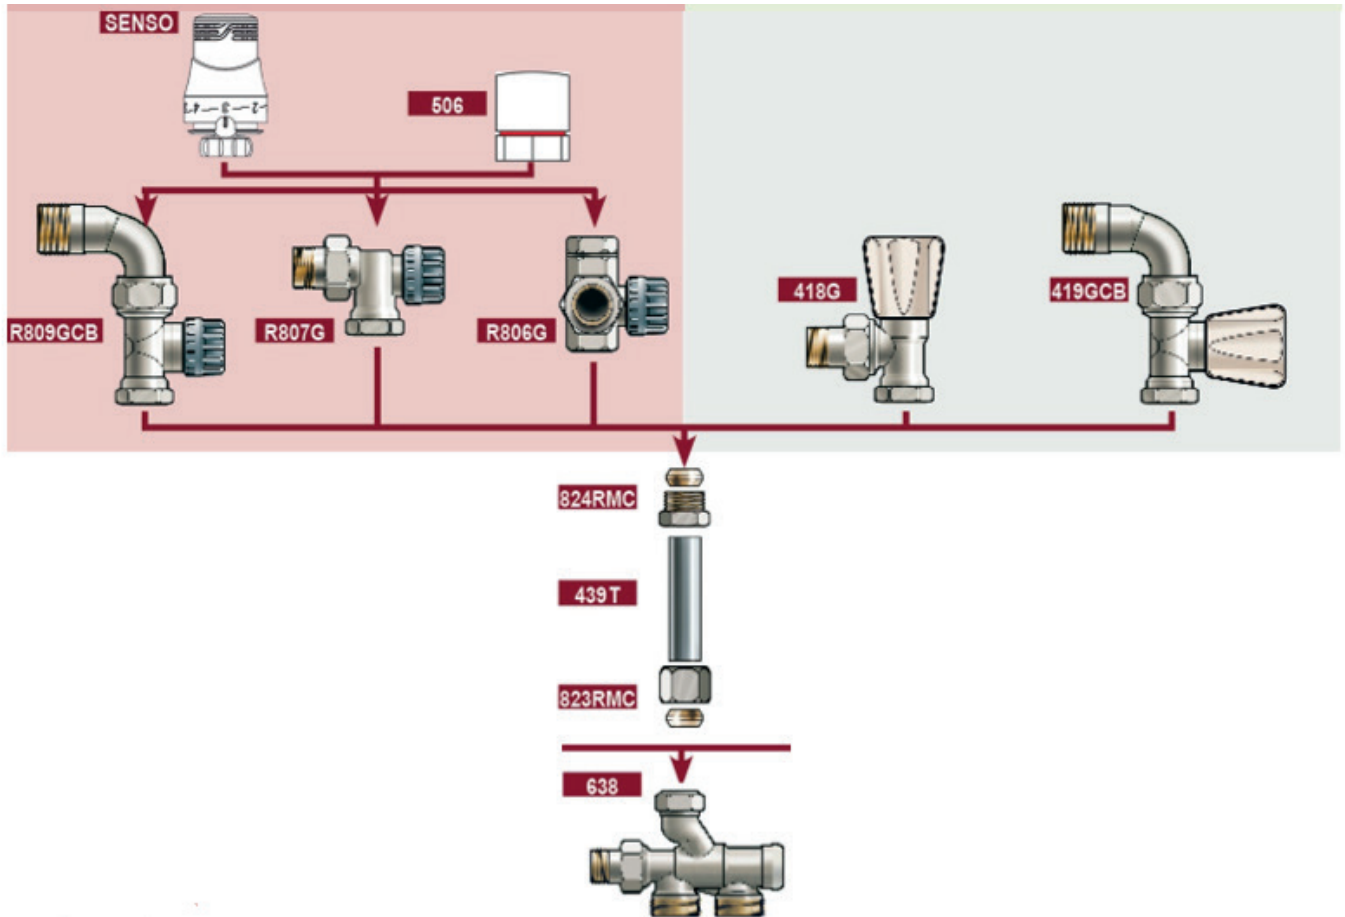

CONNECTION

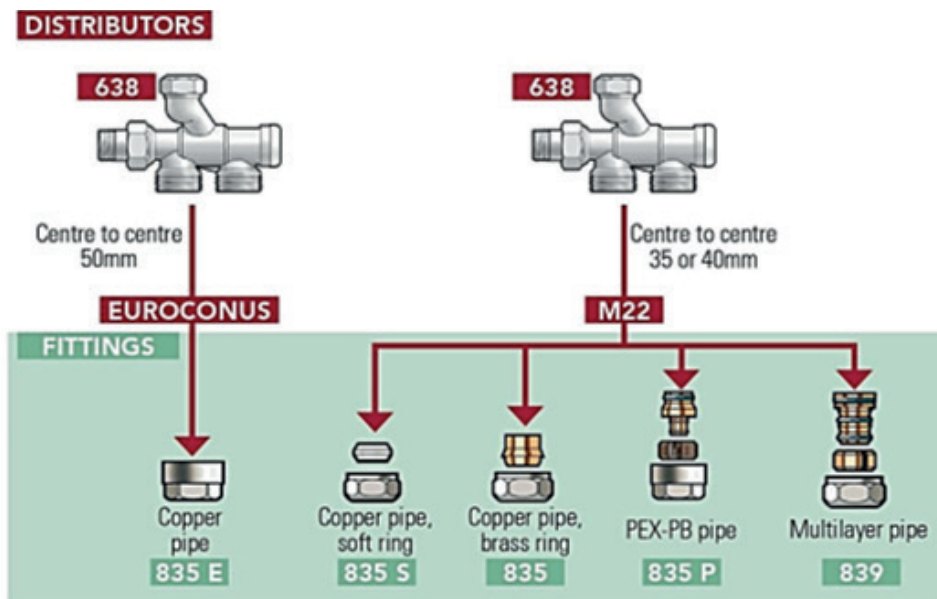



DISTRIBUTOR UNIVERSAR 638

COMAP

ACCESSORIES

Photo	Designation	Dimensions	Codes
	Manual valve 418G	1/2" Kvs 3.2	418604
	Manual valve 419GCB	Elbow 1/2"	419814
	Thermostatic head senso	M28	R100000
	Manual handwheel 506	M28/M30	L140001001
	Thermostatic valve kv fixed 0.95 R809GC	M28 elbow 1/2"	R809604QC
	Thermostatic valve kv fixed 0.95 R807G	M28 reversed angle	R807604Q
	Thermostatic valve kv fixed 0.95 R806G	M28 double angle	R808604Q
	Tube 439T	d 15mm L 1.1m	559110
	Compression fitting 824RMC	15mm 1/2"	824402



DISTRIBUTOR UNIVERSAR 638

COMAP

Photo	Designation	Dimensions	Codes
	Compression fitting 823RMC	15mm M22	823415
	Olive compression fitting M22 835	10	835410
		14	835414
		15	835415
		16	835416
		18	835418
	Mechanical fitting for PEX pipe 3/4»E 835P	16x1.5	835561
		20x2	835601
	Mechanical fitting for MultiSKIN pipe, threaded, nickel plated 839	M22 -14x2	839514
		M22 -14x2	839516
		M22 -14x2	839418
		M22 -14x2	839420
		1/2"-16x2	1C2071001
	Compression fittings M22 835S	12	835712
		15	835715
	Compression fittings for copper 3/4E nickel plated 835E	12	835912
		14	835914
		15	835915
		16	8359161
	Colors kit	Stainless	R100080
		Chrome	R100081
		Black	R100082
		Zebre	R100083
		Tangerine	R100084
		Purple	R100085
		Citrus	R100086
		Red ming	R100087
		Pearl	R100088
		Mauve	R100089
		Skyblue	R100090
		Chocolate	R100091
Anthracite	R100092		